

Photoelectric Sensors



Series OR12

Overview of diffuse reflective and retroreflective sensors

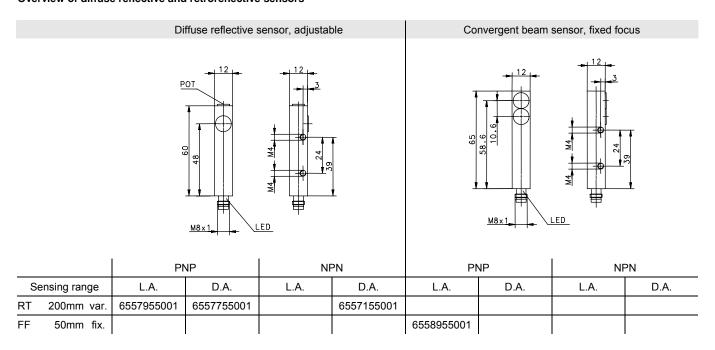

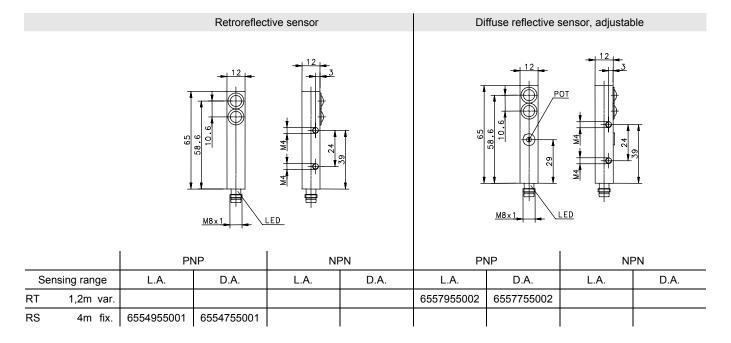

Abbreviations:

RT = Diffuse reflective sensor

RS = Retroreflective sensor

FF = Convergent beam sensor, fixed focus

var. = sensing range adjustable with potentiometer

fix. = sensing range is fixed

L.A. = light activation D.A. = dark activation

This document will not become the contractual basis; the details included herein do not constitute any descriptions of expected conditions, so that warranties/claims for defects on account of possible variations of the actual qualities from the qualities described herein are explicitly excluded. All rights reserved. Specifications subject to change without notice!


Date of issue: 10.09.2008 / Page 1 of 5


Document: 7100022000_en.doc / Last update: 1 / 0243-08

Technical DataPhotoelectric Sensors



Overview of through-beam sensors

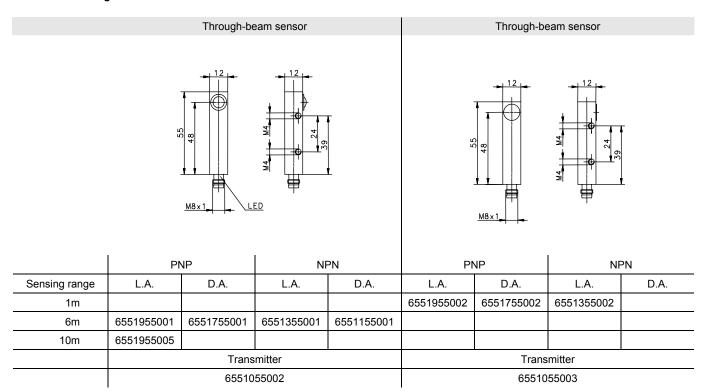

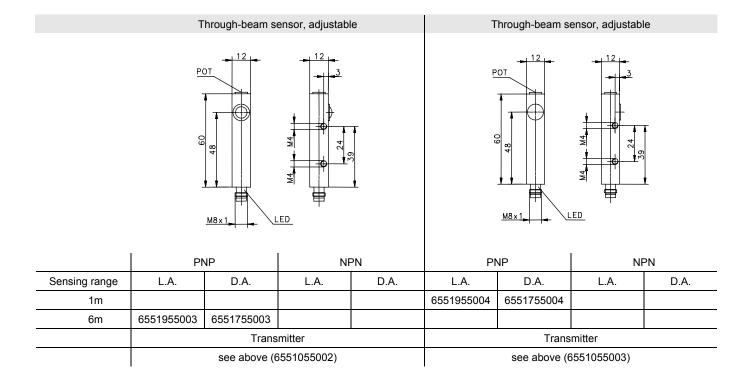

This document will not become the contractual basis; the details included herein do not constitute any descriptions of expected conditions, so that warranties/claims for defects on account of possible variations of the actual qualities from the qualities described herein are explicitly excluded. All rights reserved. Specifications subject to change without notice!

Date of issue: 10.09.2008 / Page 2 of 5

Document: 7100022000_en.doc / Last update: 3 / 0367-08

Photoelectric Sensors





Switching functions and wiring diagrams


The description refers to:

SensorsSensing typesMounting conditionsDiffuse reflective sensorRT, FFwithout an object inside the sensing rangeRetroreflective sensorRSwithout reflectorThrough beam, receiver onlyEEwithout transmitter


NPN - light activation (L.A.)









NPN - dark activation (D.A.)



PNP - dark activation (D.A.)



Through beam, transmitter only




C = Control-Input. The emitter will be turned off when "Control" and "-" get connected (system test).

Connector M8x1



Sensor with mounted female plug (angle type)



This document will not become the contractual basis; the details included herein do not constitute any descriptions of expected conditions, so that warranties/claims for defects on account of possible variations of the actual qualities from the qualities described herein are explicitly excluded. All rights reserved. Specifications subject to change without notice!


Date of issue: 10.09.2008 / Page 3 of 5

Document: 7100022000_en.doc / Last update: 3 / 0367-08

Photoelectric Sensors



Typical sensing range

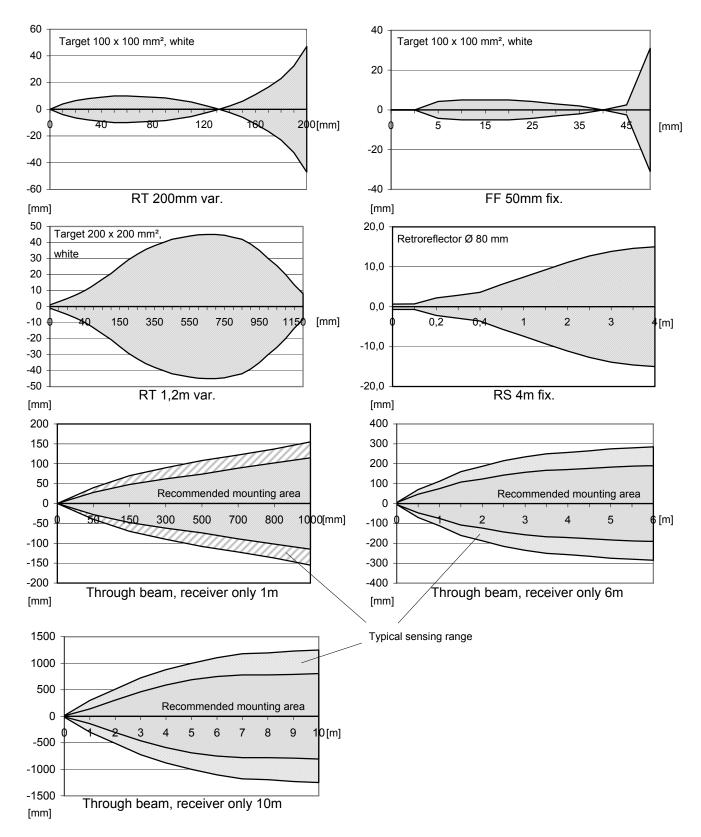

This document will not become the contractual basis; the details included herein do not constitute any descriptions of expected conditions, so that warranties/claims for defects on account of possible variations of the actual qualities from the qualities described herein are explicitly excluded. All rights reserved. Specifications subject to change without notice!

Date of issue: 10.09.2008 / Page 4 of 5

Photoelectric Sensors



Identifying characteristics in accordance with EN 60947-5-2

Electrical data		
Sensing range	S _d	See overview
Switching element function		See overview
Repeat accuracy	R	≤ 10%
Differential travel (hysteresis)	Н	< 20%
Rated operational voltage	U_e	12 – 24V DC
Operational voltage range	U_{B}	10 – 36V DC
Rated insulation voltage	U _i	75V DC
Rated impulse withstand voltage	U_{imp}	500V
Voltage drop	U_d	≤ 1,8V
Utilization category		DC 13
Rated operational current	l _e	50mA
Minimum operational current	I _m	≤ 1mA
Off–state current	I _r	≤ 0,1mA
No-load supply current	l _o	≤ 10mA (transmitter ≤ 30mA)
Rated conditional short–circuit current		100A
Max. rated output current		200mA
Ambient light proof		5kLux
Short–circuit protection		pulsed
Frequency of operating cycles	f	100Hz
False polarity protection		yes
Time delay before availability	t _v	< 15ms
Turn on time	ton	< 5ms

Electromagnetic compatibility (EMC)		
Electromagnetic field test	IEC 61000-4-3	3V/m
Electrostatic discharge test	IEC 61000-4-2	4kV
Electrical fast transient immunity test (Burst)	IEC 61000-4-4	2kV
Impulse voltage withstand ability (Surge)	IEC 61000-4-5	500V, 1,2/50μs @ Ri = 42Ω
Radiated disturbance field strength	EN 55011	≤ 40dB (µV/m)

Mechanical Data	
Enclosure	Brass, nickel plated
Beam-output	PA 12
Ambient air temperature	-5°C +70°C
Type of protection	IP 65
	(only in fully snapped-in position with it's plugs)
Pollution degree	3 (Pollution of the optic can cause impairments
-	of the operating distances.)
Indication	LED yellow (Transmitter: green)
Termination type	Plug-in connection

EU Conformity	C€

This document will not become the contractual basis; the details included herein do not constitute any descriptions of expected conditions, so that warranties/claims for defects on account of possible variations of the actual qualities from the qualities described herein are explicitly excluded. All rights reserved. Specifications subject to change without notice!

Date of issue: 10.09.2008 / Page 5 of 5 Document : 7100022000_en.doc / Last update: 3 / 0367-08